

SEMI-AUTOMATIC TRAY SEALER AK-RAMON TS-200

GENERAL CHARACTERISTICS



- Totally manufactured in AISI 304 stainless steel.
- Die set in anodized aluminum.
- Semi-automatic tray sealer.
- Automatic sealing system.
- Automatic film power supply.
- Acoustic and luminous signal from the end of the cycle.
- Cut of the film by the back side.
- Digital panel with sealing temperature regulator (0°-230° C).
- Compact and robust model.
- Easy mold change, molds are interchangeable in a few seconds.
- Fast heating of the selected temperature.
- It allows to work with different types of tray materials, PP, PET, ALUMINIUM...
- Voltage: 220 V/ 1ph/ 50 Hz.
- Maximum sealing surface: 280x192 mm.
- Film roll width: 220 mm.
- Power: 900 W.


STANDARD DIE SETS

- Multi-mold for 3 different sizes: 260x192 mm; 224x192 mm; 137x192 mm.
- 1/8 GN (168x130 mm).
- 1/4 GN (160x260 mm).
- Any type and shape of die set can be manufactured according to the customer trays.

TECHNICAL INFORMATION

	TS-200
Maximum sealing surface (mm)	280x192
Power (W)	900
Film roll width (mm)	220
Packaging dimensions (mm)	770x730x700
Net/Gross weight (Kg)	49/54

DIMENSIONS IN MM

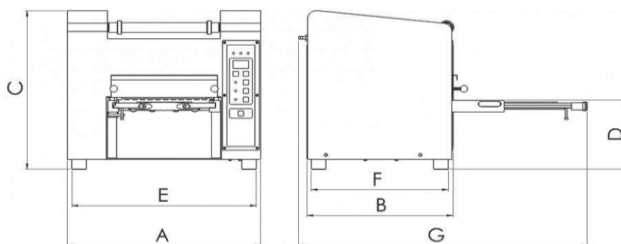

	A	B	C	D	E	F
TS-200	525	395	480	350	465	340