



SEMI-AUTOMATIC TRAY SEALER AK-RAMON TS-300 GF

GENERAL CHARACTERISTICS



- Totally manufactured in AISI 304 stainless steel.
- Die set in anodized aluminum.
- Semi-automatic tray sealer.
- Automatic sealing system.
- Equiped with gas flushing.
- Automatic film power supply.
- Acoustic and luminous signal from the end of the cycle.
- Perimetral cutting with the shape of the tray.
- Digital panel with sealing temperature regulator (0°-230° C).
- Compact and robust model.
- Easy mold change, molds are interchangeable in a few seconds.
- Fast heating of the selected temperature.
- It allows to work with different types of tray materials, PP, PET, ALUMINIUM...
- Voltage: 220 V/ 1ph/ 50 Hz.
- Maximum sealing surface: 320x260 mm.
- Film roll width: 430 mm.
- Power: 1,500 W.

STANDARD DIE SETS

- 1/2 GN (320x260 mm) – 1 tray.
- 1/4 GN (260x160 mm) – 2 trays.
- 1/8 GN (168x130 mm) – 4 trays.
- Any type and shape of die set can be manufactured according to the customer trays.


OPTIONS

- 6L silent compressor.

TECHNICAL INFORMATION

	TS-300 GF
Packaging dimensions (mm)	770x730x700
Net/Gross weight (Kg)	65/75
Film roll width (mm)	430
Power (W)	1500W
Maximum sealing surface (mm)	320x260

DIMENSIONS IN MM

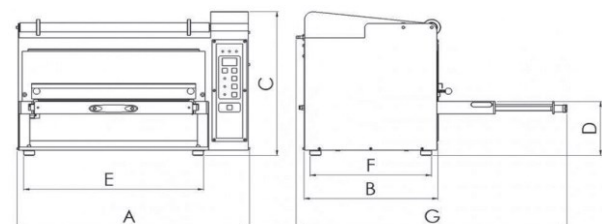

	A	B	C	D	E	F	G
TS-300 GF	671	385	480	375	490	325	770

C/RAFAEL RIERA PRATS, 49. 08339 VILASSAR DE DALT – BARCELONA -SPAIN

+34. 937.531.311

www.akbyramon.com

info@akbyramon.com